



Plot No. - 2531, Opp. Nebula Surgical, Gate No. 2, Almighty Gate, GIDC, Metoda, Kalawad Road, Rajkot - 360021, Gujarat.

info@bhavyaindia.co.in www.bhavyawindow.com World Wide



#### experience the **WAW**

wav

416.

IGuau

Waouh!

Uau

Bay!

わお! .

ما م

Vaw!

Uau!

Páni !

Váó!

Wao!

Hhawu!

# The Introduction to Worldwide Wonder

World of Aluminium Windows (WAW), a flagship brand of Bhavya Aluwin LLP, stands at the forefront of innovation in aluminium fenestration

Established in 2003 in Rajkot, Gujarat, WAW has continuously redefined the standards of aluminium windows and doors, delivering solutions that blend strength, aesthetics, and functionality.

### A Legacy of Innovation and Precision:

Operating from a state-of-the-art, 10,000 sq. m manufacturing facility, we integrate cutting edge technology with precision engineering to craft fenestration solutions that meet international standards. Our in-house quality testing ensures superior durability, energy efficiency, and craftsmanship. With an annual production capacity of 50,000 sq. m, WAW is equipped to cater to both residential and commercial markets with seamless execution.

#### Global Reach, Local Expertise:

From a domestic leader to a global innovator, WAW has expanded beyond India, exporting to five countries with a vision to penetrate more international markets. Our presence across 18 showrooms in India and a strong partner network underscores our commitment to delivering world-class aluminium systems tailored for diverse architectural needs.

### Innovation That Defines WAW:

WAW offers a premium range of aluminium windows and doors that not only enhance the aesthetics of spaces but also deliver top-tier performance. Our designs embrace minimalism, maximizing natural light, insulation, and architectural elegance. Each product is a fusion of strength, design, and precision, making it the preferred choice for modern living and commercial environments.

### A Commitment to Sustainability:

Sustainability is a core principle at WAW. We utilize recyclable aluminium, energy-efficient designs, and solar-powered manufacturing to ensure minimal environmental impact while delivering high-performance products that contribute to a greener future.

### **Empowering the Industry Through Education:**

WAW is dedicated to fostering knowledge and innovation in the fenestration industry through Khidki ki Pathshala, an initiative designed to promote awareness and technical expertise. By sharing industry insights and advancements, we contribute to the evolution of modern fenestration solutions.

At WAW, every window and door is not just a product but a statement of design excellence, precision engineering, and a commitment to sustainable and transformative architecture.




experience the WAW

Discover a diverse range of products that cater to a variety of needs and preferences.

## .Content


SLIDING	SL 25	03
	SL 25 R	05
	SL 29	07
	SL 29 R	09
	SL 36	11
	SL 55	13
	SL 55 R	15
	CELARE 30	17
	Lift & Slide 55	19
■ CASEMENT	CV 40	23
	CW 40	25
	CW 50	27
	CD 40	29
	CD 50	31
	CD 60	33
	CW 120 G/M	35
	OW 120 G/11	
■ VERTICAL SLIDING	VS 50	37
	VS 83	39
SLIDING FOLDING	SF 70	43
■ OFFICE PARTITION	OP 60	45
ALUMINIUM MOVEBLE		47
LOUVERS		
■ SKY LIGHT		49

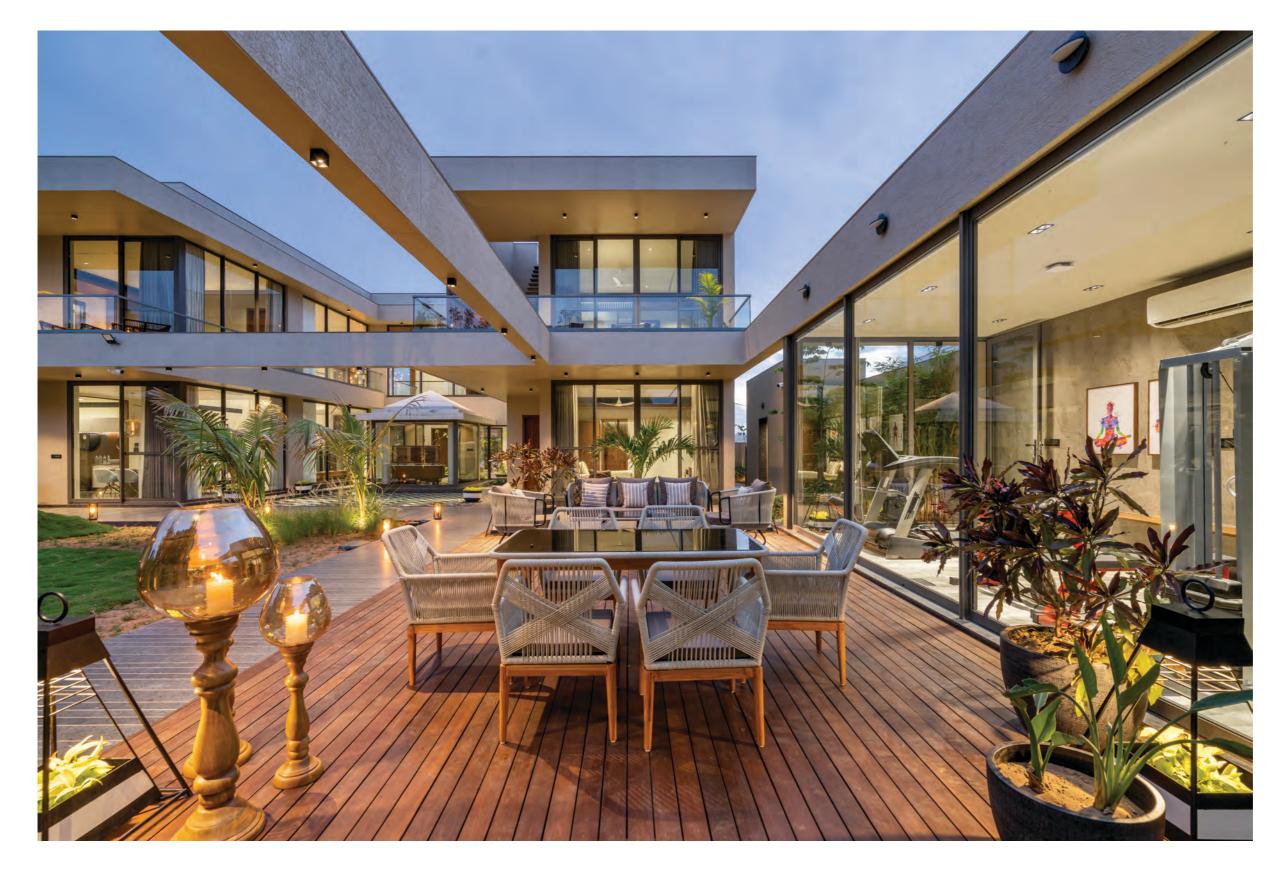

# The Sustainable Story

#### Style, Space, and Sophistication Redefined

Aluminum Windows and Door offer a perfect Combination of Style and Durability, Providing superior Weather Resistance and Sleek, Modern Aesthetics. Experience enhanced Natural Light, Better Airflow, and Energy-efficient Comfort in every Space.

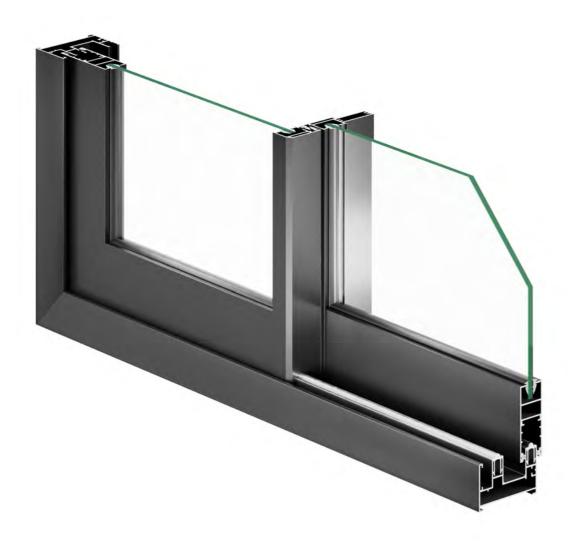

## GLAZING FINISHES HARDWARE Option Single Powder Coating Lock - Single Point Locking Thickness 5 mm to 8 mm (Satin | Texture finish | Wooden effect powder coating)

#### **VERTICAL CONNECTION**

Joinery Detail -  $45^{\circ}$  With corner connector |  $90^{\circ}$  with screw fixing

#### SL 25


#### **DIMENSIONS**


Shutter size 25 mm x 64 mm
2 Track 65 mm x 40 mm
3 Track 103 mm x 40 mm
Interlock Visible 23 mm

#### CONFIGURATION


Window Height Max. 1800 mm Sash Weight Max. 70 Kg. Mosq. Mesh Fiber Mesh

SS 304 Safety Mesh SS 304 Invisible Mesh Retractable Mesh





04

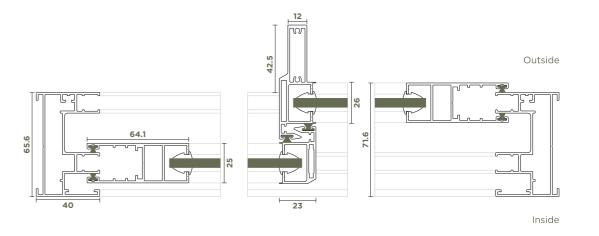

<sup>\*</sup> ALL DIMENSIONS ARE IN MM.

03



## GLAZING FINISHES HARDWARE Option Single Powder Coating Lock - Single Point Locking Thickness 5 mm to 8 mm (Satin | Texture finish | Wooden effect powder coating)

#### **VERTICAL CONNECTION**

Joinery Detail - 45° with corner connector

#### SL 25 R


#### **DIMENSIONS**


Shutter size 25 mm x 64 mm
2 Track 65 mm x 40 mm
3 Track 103 mm x 40 mm
Interlock Visible 69 mm

#### CONFIGURATION


Window Height Max. 1800 mm Sash Weight Max. 70 Kg. Mosq. Mesh Fiber Mesh

SS 304 Safety Mesh SS 304 Invisible Mesh Retractable Mesh





06

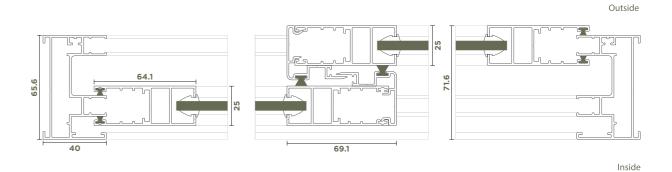

<sup>\*</sup> ALL DIMENSIONS ARE IN MM.

05



GLAZING		FINISHES	HARDWARE	
Option	Single   Laminated DGU	Powder Coating (Satin   Texture finish   Wooden effect powder coating)	Lock - Multi Point Locking	
Thickness	5 mm to 20 mm			

#### **VERTICAL CONNECTION**

Joinery Detail -  $45^{\circ}$  with corner connector |  $90^{\circ}$  with screw fixing

#### SL 29


#### **DIMENSIONS**


Shutter size 29 mm x 66 mm
2 Track 73 mm x 45 mm
3 Track 115 mm x 45 mm
4 Track 157 mm x 45 mm
Interlock Visible 25 mm


#### CONFIGURATION

Window Height 2400 mm Sash Weight 180 Kg. Mosq. Mesh Fiber Mesh

SS 304 Safety Mesh SS 304 Invisible Mesh Retractable Mesh





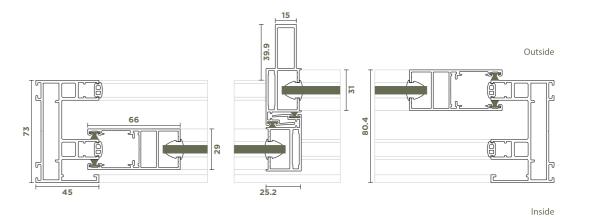

<sup>\*</sup> ALL DIMENSIONS ARE IN MM.

07



## GLAZING FINISHES HARDWARE Option Single | Laminated DGU | Powder Coating (Satin | Texture finish | Wooden effect powder coating) Thickness 5 mm to 20 mm

#### **VERTICAL CONNECTION**

Joinery Detail - 45° with corner connector

#### SL 29 R


#### **DIMENSIONS**


Shutter size 29 mm x 66 mm
2 Track 73 mm x 45 mm
3 Track 115 mm x 45 mm
4 Track 157 mm x 45 mm
Interlock Visible 68 mm

#### CONFIGURATION

Window Height 2400 mm Sash Weight 180 Kg. Mosq. Mesh Fiber Mesh


SS 304 Safety Mesh SS 304 Invisible Mesh Retractable Mesh





Outside

10

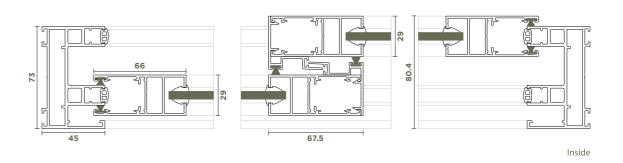

<sup>\*</sup> ALL DIMENSIONS ARE IN MM.

09



# GLAZING FINISHES HARDWARE Option Single | Laminated DGU | Coating (Satin | Texture finish | Wooden effect powder coating) Thickness 6 mm to 24 mm

#### **VERTICAL CONNECTION**

Joinery Detail -  $45^{\circ}$  with corner connector |  $90^{\circ}$  with screw fixing

#### SL 36


#### **DIMENSIONS**


Shutter size 36 mm x 72 mm
2 Track 80 mm x 45 mm
3 Track 126 mm x 45 mm
4 Track 171 mm x 45 mm
Interlock Visible 28 mm

#### CONFIGURATION


Window Height 3600 mm Sash Weight 240 Kg. Mosq. Mesh Fiber Mesh

SS 304 Safety Mesh SS 304 Invisible Mesh Retractable Mesh






12

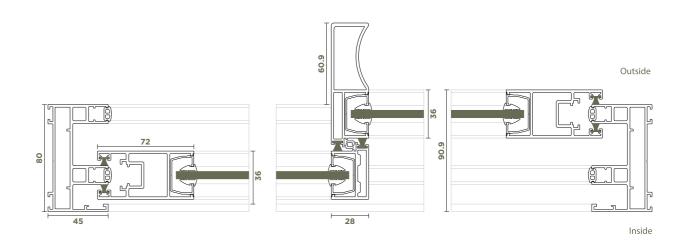

<sup>\*</sup> ALL DIMENSIONS ARE IN MM.

11

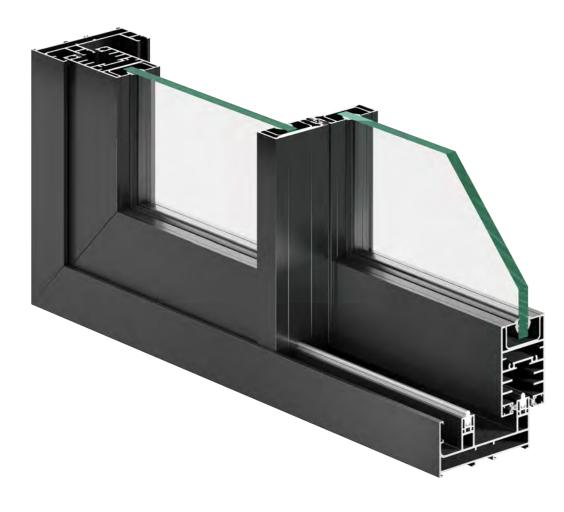


# GLAZING FINISHES HARDWARE Option Single | Laminated DGU | DGU With Integrated Blinds Thickness 12 mm to 44 mm

OPERATION	VERTICAL CONNECTION
Manual, Motorised	Joinery Detail - 45° with corner connector   90° with screw fixing

#### SL 55

#### **DIMENSIONS**


Shutter size 55 mm x 83 mm
2 Track 112 mm x 51 mm
3 Track 181 mm x 51 mm
Interlock Visible 28 mm




#### CONFIGURATION

Window Height Max. 3600 mm Sash Weight Max. 300 Kg.


Mosq. Mesh Retractable | SS 304 Safety Mesh



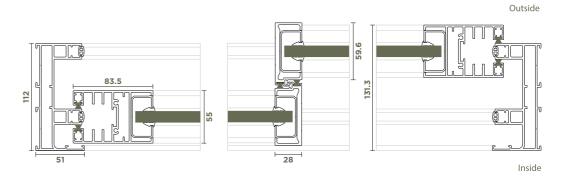

<sup>\*</sup> ALL DIMENSIONS ARE IN MM.

13

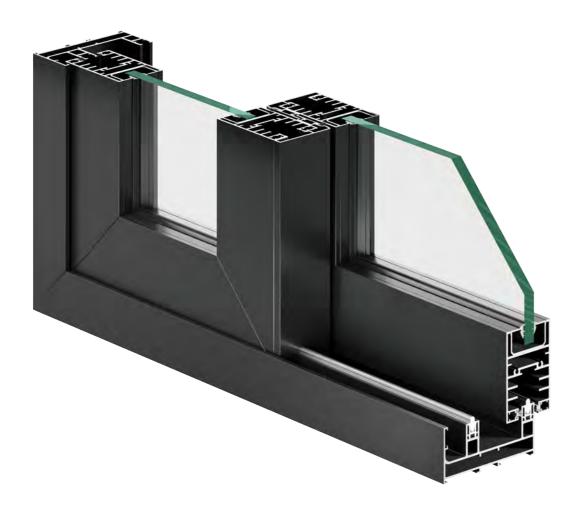


# GLAZING FINISHES HARDWARE Option Single | Laminated DGU | DGU With Integrated Blinds Thickness 12 mm to 44 mm

OPERATION	VERTICAL CONNECTION
Manual, Motorised	Joinery Detail - 45° with corner connector

#### SL 55 R

#### **DIMENSIONS**


Shutter size 55 mm x 83 mm
2 Track 112 mm x 51 mm
3 Track 181 mm x 51 mm
Interlock Visible 92 mm




#### CONFIGURATION

Window Height Max. 3600 mm Sash Weight Max. 300 Kg.

Mosq. Mesh Retractable | SS 304 Safety Mesh



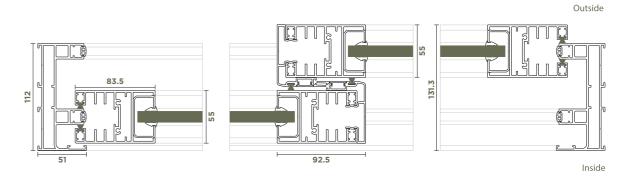

<sup>\*</sup> ALL DIMENSIONS ARE IN MM.

15



# GLAZING FINISHES HARDWARE Option Single | Laminated DGU Powder Coating (Satin | Texture finish | Wooden effect powder coating) Thickness 12 mm to 24 mm

#### **VERTICAL CONNECTION**

Joinery Detail - 45° with corner connector | 90° with screw fixing


#### **CELARE 30**

#### **DIMENSIONS**


Shutter size 58 mm x 30 mm
2 Track 140 mm x 56 mm
Interlock Visible 31 mm

#### **CONFIGURATION**

Window Height Max. 3000 mm Sash Weight Max. 180 Kg. Mosq. Mesh Retractable

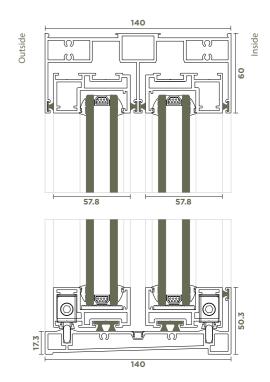


Outside

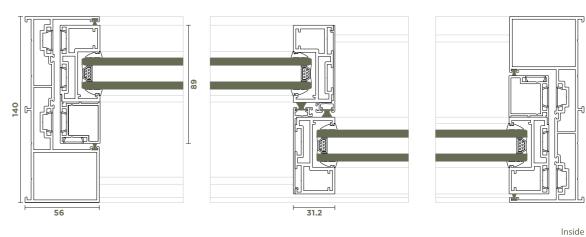

\* ALL DIMENSIONS ARE IN MM.

17

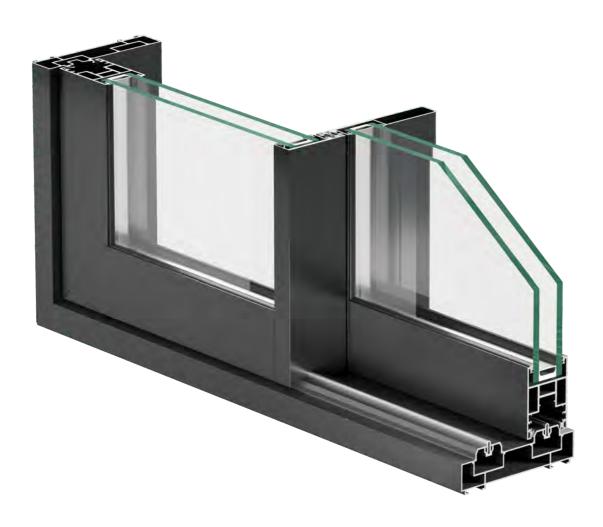

#### 

#### **VERTICAL CONNECTION**

Joinery Detail - 45° with corner connector | 90° with screw fixing


#### Lift & Slide 55

#### **DIMENSIONS**


Shutter size 55 mm x 78.5 mm 2 Track 155 mm x 47.5 mm Interlock Visible 25 mm

#### CONFIGURATION

Window Height Max. 3600 mm Sash Weight 400 Kg. Mosq. Mesh Retractable

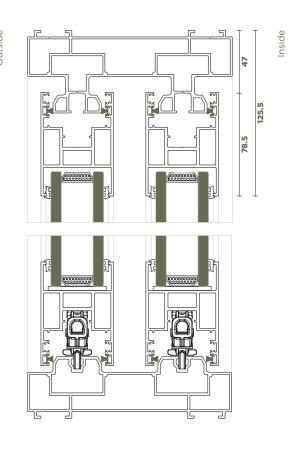

20

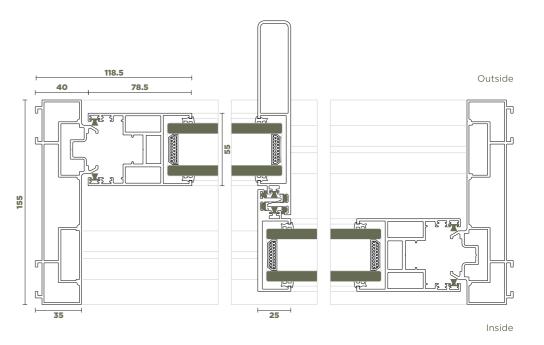


<sup>\*</sup> ALL DIMENSIONS ARE IN MM.

### **Casement Perfection, Strength Meets Style**

Aluminium casement windows and doors offer sleek design, smooth operation, and lasting durability. They provide excellent ventilation, clear views, and energy efficiency, making them ideal for modern spaces. Built for strength and low maintenance, they enhance both style and functionality.



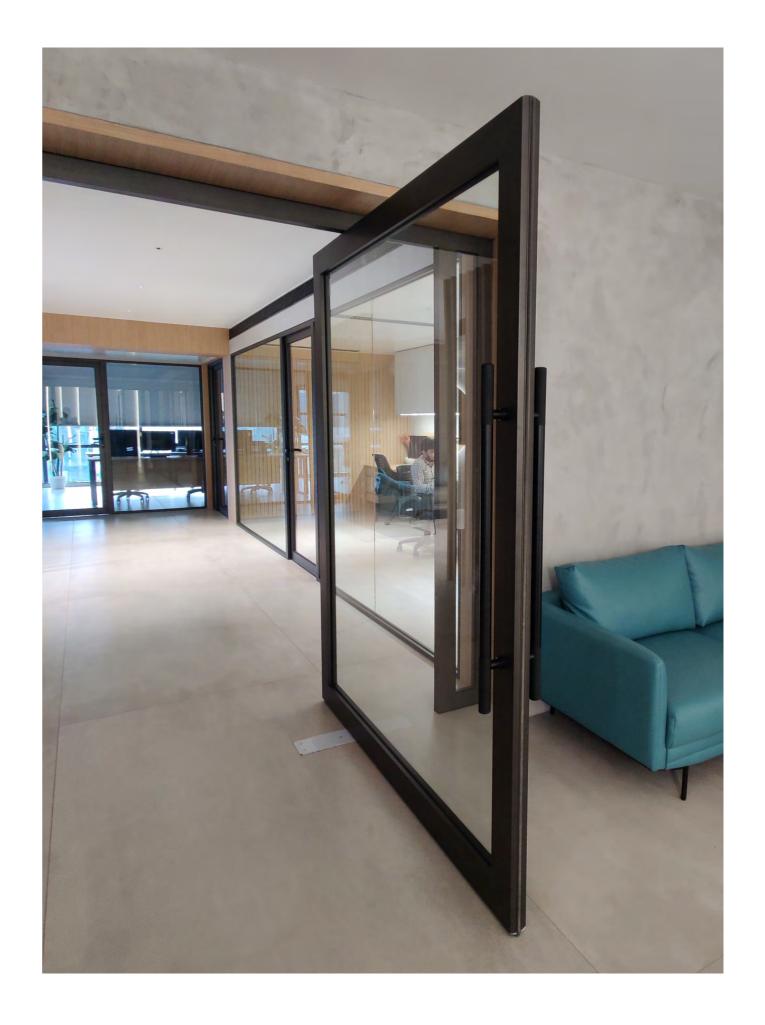



## GLAZING FINISHES HARDWARE Option Single Powder Coating Lock - Single Point Locking Thickness 5 mm | 6 mm (Satin | Texture finish | Wooden effect powder coating) Hinge - Butt Hinge | Friction Hinge


#### **VERTICAL CONNECTION**

Joinery Detail - 45° with corner connector

#### CV 40

#### **DIMENSIONS**


Shutter size 40 mm x 51 mm Frame 40 mm x 39 mm




#### **CONFIGURATION**

Sash Height Max. 1000 mm
Sash Width Max. 600 mm
Sash Weight Max. 25 Kg.
Mosq. Mesh Retractable

Opening Side Hung | Top Hung



24

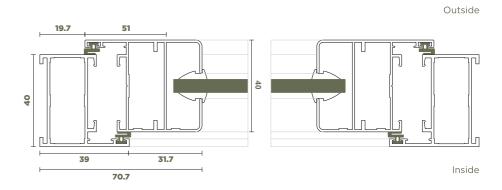

<sup>\*</sup> ALL DIMENSIONS ARE IN MM.

23



#### GLAZING FINISHES HARDWARE

Option	Single   Laminated	Powder Coating	Lock - Multi Point Locking
	DGU	(Satin   Texture finish   Wooden effect powder coating)	Hinge - Butt Hinge   Friction Hinge
Thickness	5 mm to 20 mm		


#### **VERTICAL CONNECTION**

Joinery Detail -  $45^{\circ}$  with corner connector

#### . CW 40

#### **DIMENSIONS**


Shutter size 40 mm x 66 mm Frame 40 mm x 56 mm




#### CONFIGURATION

Sash Height Max. 1800 mm
Sash Width Max. 650 mm
Sash Weight Max. 50 Kg.
Mosq. Mesh Retractable

Opening Side Hung | Top Hung



Outside

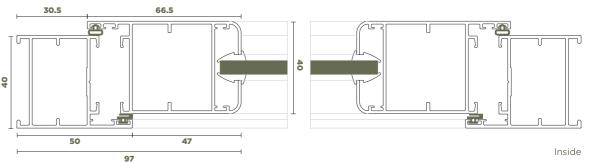

<sup>\*</sup> ALL DIMENSIONS ARE IN MM.

25



## GLAZING FINISHES HARDWARE Option Single | Laminated DGU | DGU With (Satin | Texture finish | Wooden effect powder coating) Hinge - Butt Hinge | Friction Hinge

#### **VERTICAL CONNECTION**

Thickness

Joinery Detail - 45° with corner connector

Integrated Blinds

5 mm to 39 mm

#### CW 50

#### **DIMENSIONS**


Shutter size 50 mm x 78 mm Frame 50 mm x 55 mm

#### **CONFIGURATION**


Sash Height Max. 2000 mm
Sash Width Max. 700 mm
Sash Weight Max. 80 Kg.
Mosq. Mesh Retractable

Opening Side Hung | Top Hung





28

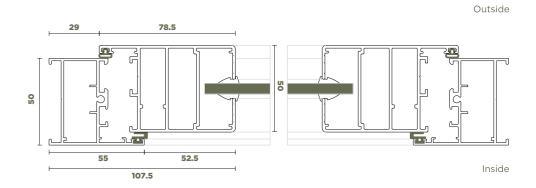

<sup>\*</sup> ALL DIMENSIONS ARE IN MM.

27



## GLAZING FINISHES HARDWARE Option Single glass HPL sheet Single point Locking (Satin | Texture finish | Wooden effect powder coating) Thickness HARDWARE Lock - Single Point Locking Hinge - Butt Hinge

#### **VERTICAL CONNECTION**

Joinery Detail - 45° with corner connector


#### . CD 40


#### **DIMENSIONS**

Shutter size 40 mm x 85 mm Frame size 40 mm x 50 mm


#### **CONFIGURATION**

Door Height Max. 2400 mm
Sash Width Max. 1000 mm
Sash Weight Max. 100 Kg.
Mosq. Mesh Retractable
Operation Side Hung





30

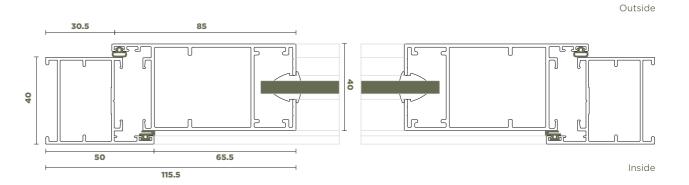

<sup>\*</sup> ALL DIMENSIONS ARE IN MM.

29



## Option Single | Laminated DGU | DGU With Integrated Blinds FINISHES HARDWARE Lock - Multi Point Locking Hinge - Butt Hinge

#### **VERTICAL CONNECTION**

Thickness

Joinery Detail - 45° with corner connector

5 mm to 39 mm


#### \_CD 50

#### **DIMENSIONS**


Shutter size 50 mm x 100 mm Frame size 50 mm x 73 mm

#### **CONFIGURATION**

Door Height Max. 3000 mm
Sash Width Max. 1200 mm
Sash Weight Max. 180 Kg.
Mosq. Mesh Retractable
Operation Side Hung

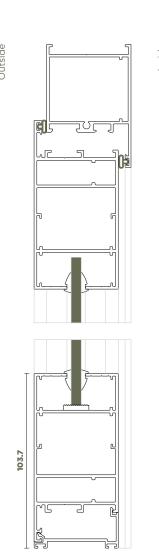

32

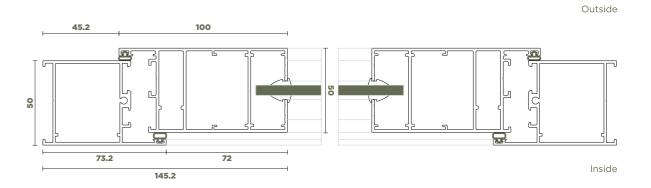

\* ALL DIMENSIONS ARE IN MM.



GLAZING FINISHES HARDWARE

Option Single | Laminated
DGU | DGU With
Integrated Blinds

Thickness

(Satin | Texture fin

Integrated Blinds
5 mm to 44 mm

Powder Coating
(Satin | Texture finish | Wooden effect powder coating)

Lock - Multi Point Locking

Hinge - Butt Hinge | Friction Hinge

33

#### **VERTICAL CONNECTION**

Joinery Detail -  $45^{\circ}$  with corner connector


#### CD 60

#### **DIMENSIONS**


Shutter size 60 mm x 81 mm Frame 60 mm x 61 mm

#### **CONFIGURATION**


Window Height Max. 3000 mm
Sash Width Max. 1200 mm
Sash Weight Max. 200 Kg.
Mosq. Mesh Retractable
Opening Side Hung

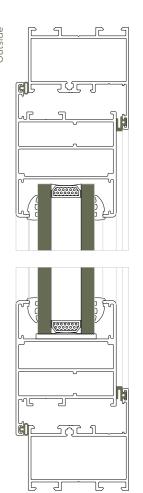

34

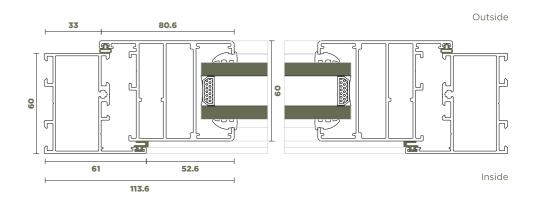

<sup>\*</sup> ALL DIMENSIONS ARE IN MM.

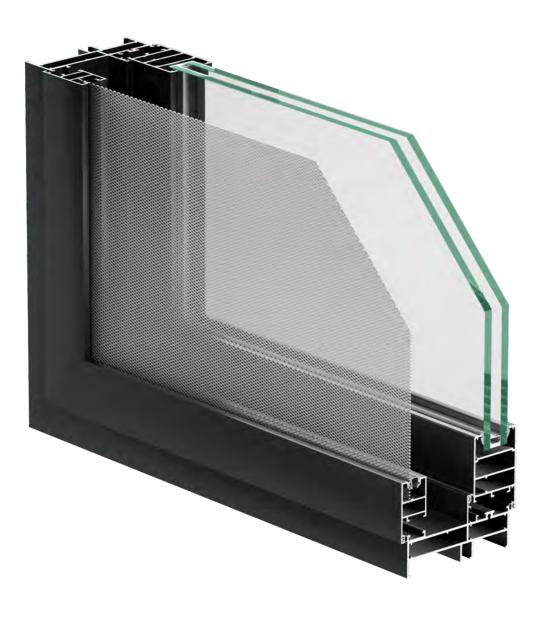

# GLAZING FINISHES HARDWARE Option Single | Laminated DGU | DGU With Integrated Blinds Thickness Finishes Finishes Powder Coating Lock - Multi Point Locking Hinge - Butt Hinge | Friction Hinge

#### **VERTICAL CONNECTION**

Joinery Detail - 45° with corner connector

#### . CW 120 G/M

#### **DIMENSIONS**


Glass Shutter size 50 mm x 78 mm

Mesh Shutter Size 29 mm x 55 mm


Frame 120 mm x 60 mm

#### **CONFIGURATION**

Sash Height Max. 2000 mm
Sash Width Max. 700 mm
Glass Sash Weight Max. 80 Kg.
Mesh Sash Weight Max. 30 Kg.
Mosq. Mesh SS 304 Safety Mesh
Opening Side Hung | Top Hung

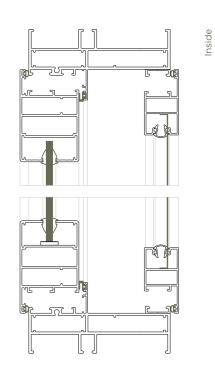

36

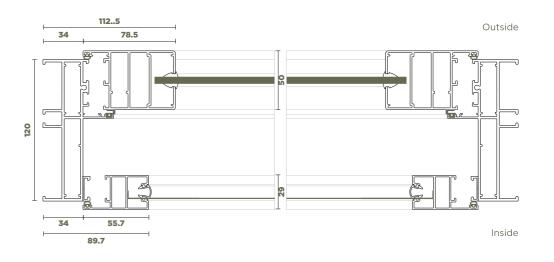

<sup>\*</sup> ALL DIMENSIONS ARE IN MM.



#### **GLAZING**

Option Single
Thickness 5 mm

#### **FINISHES**

Powder Coating

(Satin | Texture finish | Wooden effect powder coating)

#### **HARDWARE**

Lock - Single Point Locking

#### **VERTICAL CONNECTION**

Joinery Detail - 45° with corner connector | 90° with screw fixing


#### . VS 50


#### **DIMENSIONS**


2 Track 50 mm x 40 mm Visible Interlock 45.6 mm

#### CONFIGURATION

Sash Height Max. 1500 mm
Sash Width Max. 1500 mm
Sash Weight Max. 25 Kg.








Outside

38

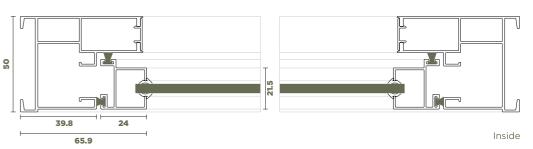

<sup>\*</sup> ALL DIMENSIONS ARE IN MM.

37



#### **GLAZING**

Option Single | DGU

Thickness 5 mm | 6 mm | 8 mm | 18 mm

#### **FINISHES**

Powder Coating

(Satin | Texture finish | Wooden effect powder coating)

#### **HARDWARE**

Lock - Single Point Locking

#### **VERTICAL CONNECTION**

Joinery Detail - 45° with corner connector | 90° with screw fixing


#### **VS 83**

#### **DIMENSIONS**


2 Track 83 mm x 43 mm Visible Interlock 52.8mm

#### CONFIGURATION

Sash Height Max. 2000 mm
Sash Width Max. 1800 mm
Sash Width Max. 27 Kg.
Mosq. Mesh SS 304 Safety Mesh

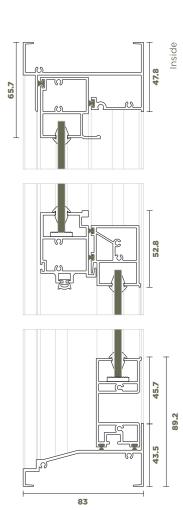

40

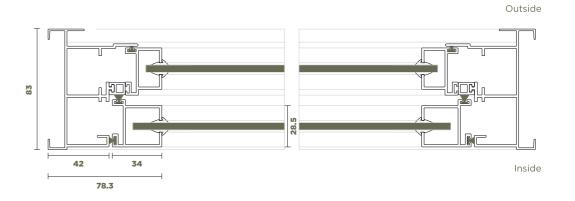

\* ALL DIMENSIONS ARE IN MM.

39

### Sliding Folding




#### **Transforming Spaces with Every Fold**



#### DIMENSIONS

Shutter size 71 mm x 60 mm Frame 70 mm x 51 mm



#### CONFIGURATION


Door Height Max. 3000 mm
Panel Width Max. 900 mm
Mosq. Mesh Retractable

#### **GLAZING**

#### **FINISHES**

Option	Single   Laminated	Powder Coating
	DGU   DGU With	(Satin   Texture finish   Wooden effect powder coating)
	Integrated Blinds	
Thickness	8 mm to 30 mm	

### 32.2 59.5 59.5 54.5 37.2



\* ALL DIMENSIONS ARE IN MM.

HARDWARE VERTICAL CONNECTION

Lock - Multi Point Locking Hinge - Butt Hinge Joinery Detail - 45° with corner connector


43

experience the **WAW** 

Outside


Inside

44

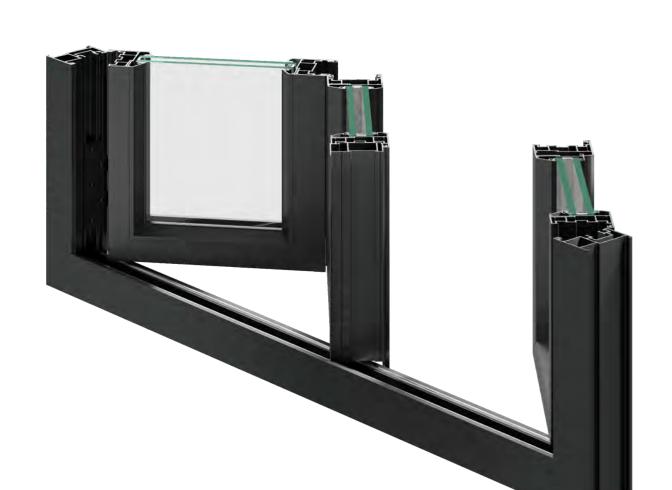

FIN

143.9 59.5 76.4

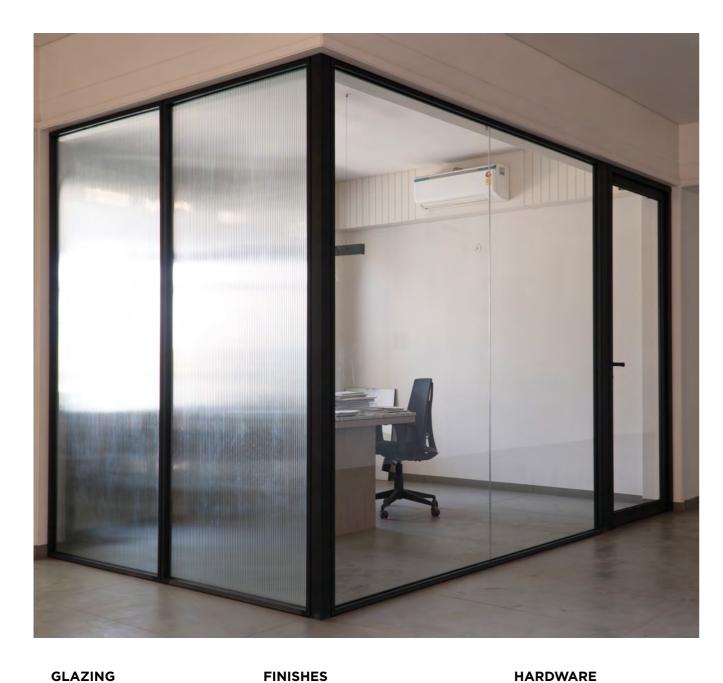

#### **GLAZING FINISHES**

Option Single | Laminated Powder Coating Lock - Single Point Locking DGU (Satin | Texture finish | Wooden effect powder coating) 12 mm to 24 mm Thickness

#### **VERTICAL CONNECTION**

Joinery Detail - 45° with corner connector | 90° with screw fixing


#### • OP 60


#### **DIMENSIONS**

Fix Frame size 60 mm x 28 mm Door Frame Size 60 mm x 46 mm

#### **CONFIGURATION**

Door Option Pivoted | Hinge

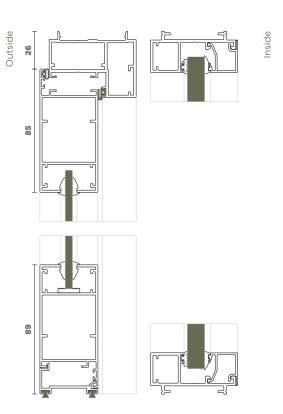

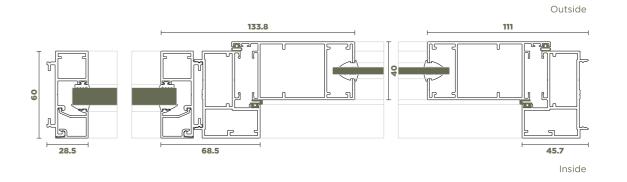

<sup>\*</sup> ALL DIMENSIONS ARE IN MM.

45

#### **ALUMINIUM MOVABLE LOUVERS**



#### **DIMENSIONS**

Louver Blade Size 16 mm x 66 mm


#### **POSSIBLE IN**

SL 36 | CW 50 | CW 40

#### **CONFIGURATION**

Louver Width
Allowable Height in Single Louver Handle

300 mm to 900 mm Max. 1000 mm

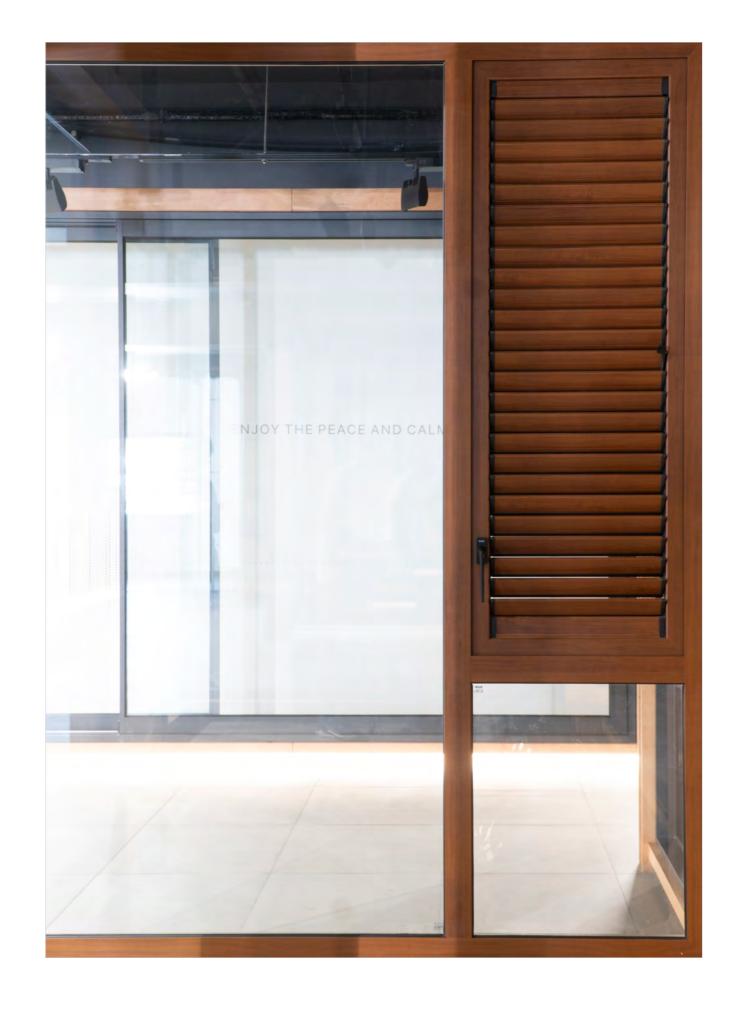



#### SKYLIGHT

#### **DIMENSIONS**

Frame Size 40 mm x 74 mm

#### CONFIGURATION

Panel Width Max. 1500 mm
Panel Length Max. 3000 mm

#### GLAZING

Option Laminated | Laminated DGU With

Integrated Blinds


Thickness 15.52 mm | 59 mm

#### **FINISHES**

Powder Coating

(Satin | Texture finish | Wooden effect powder coating)

50

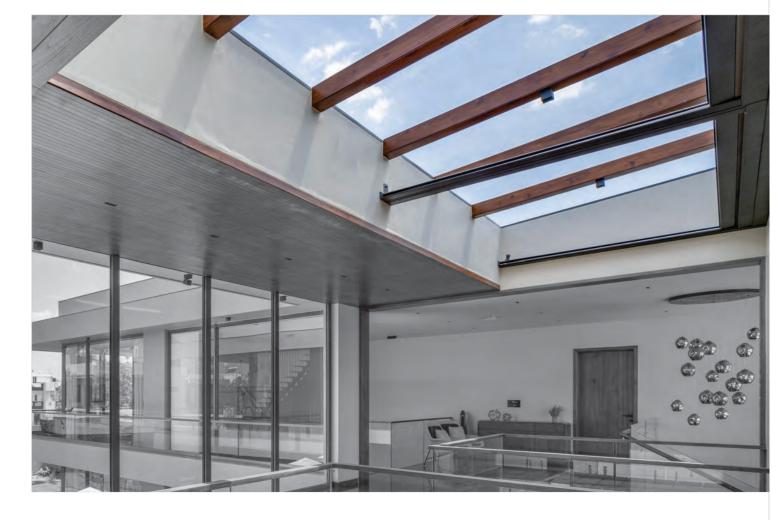

### Channel Partners Across India



Strengthening bonds and building networks, our esteemed channel partners span the length and breadth of India.

Together, we deliver excellence, innovation, and reliability to every corner of the nation.

experience the WAW

Channel Partners name